



THIEN LOC PHAT TECHNOLOGY TRADING CO., LTD

Liaison Office: 11/34 Thoai Ngoc Hau St., Hoa Thanh Ward, Tan Phu Dist., Ho Chi Minh City

Head Office: 488/56 Pham Van Chieu St., 16 Ward, Go Vap Dist., Ho Chi Minh City

Tel: +84 283 815 88 66 Fax: +84 283 815 88 77 Email: cco@thienlocphatelectric.com

Website: <http://thienlocphatelectric.com> ; <http://giadiencongnghep.com>

TRAO GIÁ TRỊ - NHẬN NIỀM TIN



Shihlin Electric

(Áp dụng: Từ ngày 01/01/2022)

BẢNG GIÁ

BREAKER & SWITCHGEAR SYSTEM



<http://circuit-breaker.seec.com.tw>

No.1  Taiwan

ELECTRIC COMPANY in TAIWAN

Shihlin Electric Light Up Taipei 101,
One Of World Tallest Buildings

POWER
TO THE
WORLD



Air Circuit Breaker



Molded Case
Circuit Breaker



Miniature
Circuit Breaker



Magnetic
Contactor / Starter



Type		BMA160		BMA250		BMA400	
Frame Size		160AF		250AF		400AF	
Model		STA	LTA	STA	LTA	HTA	RTA
Pole		3P / 4P		3P / 4P		3P / 4P	
Frequency (Hz)		50 / 60		50 / 60		50 / 60	
Rated Current, In		40.50.60.63.70.75.80.100. 125.140.150.160A		175.200.225.250A		250.300.350.400A	
Breaking Capacity, Icu (AC)	690V	8 kA	8 kA	10 kA	10 kA	10 kA	15 kA
	415V	25 kA	36 kA	25 kA	36 kA	50 kA	70 kA
	380V	25 kA	36 kA	25 kA	36 kA	50 kA	70 kA
Ics (%Icu)		100		100		100	
DimensionW x H x D (mm)	3P	105 x 165 x 68		105 x 165 x 68		140 x 257 x 103	
	4P	140 x 165 x 68		140 x 165 x 68		185 x 257 x 103	
Weight (kg)	3P	1.5		1.5		5.7	
	4P	1.9		1.9		7.5	

Type		BMA630		BMA800	
Frame Size		630AF		800AF	
Model		HED	RED	HED	RED
Pole		3P / 4P		3P / 4P	
Frequency (Hz)		50 / 60		50 / 60	
Rated Current, In		630A		800A	
Breaking Capacity, Icu (AC)	690V	10 kA	15 kA	10 kA	15 kA
	415V	50 kA	70 kA	50 kA	70 kA
	380V	50 kA	70 kA	50 kA	70 kA
Ics (%Icu)		100		100	
DimensionW x H x D (mm)	3P	210 x 275 x 103		210 x 275 x 103	
	4P	280 x 257 x 103		280 x 257 x 103	
Weight (kg)	3P	11.5		12	
	4P	15.3		15.8	



Giá bán đã bao gồm thuế VAT 10%

MCCB / ELCB

MCCB (Aptomat) 2P Tiêu chuẩn IEC60947-2			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BM 30-CN 2P	5.10.15.20.30A	1.5	437,000
BM 50-CN 2P	40.50A	2.5	561,000
BM 100-MN 2P	15.20.30.40.50A	10	774,000
	60.75.100A		814,000
BM 100-SN 2P	15.20.30.40.50.60.75.100A	15	867,000
BM 400-CN 2P	250.300.350.400A	25	4,101,000

MCCB (Aptomat) 2P Tiêu chuẩn IEC60947-2 (Chỉnh dòng 0.8~1*In)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BM 250-SN 2P	125~250A(0.8~1*In Adj.)	30	1,640,000

MCCB (Aptomat) 3P Tiêu chuẩn IEC60947-2			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BM 30-CN 3P	5.10.15.20.30A	1.5	606,000
BM 50-CN 3P	40.50A	2.5	624,000
BM 100-MN 3P	15.20.30.40.50A	10	777,000
	60.75.100A		981,000
BM 100-SN 3P	15.20.30.40.50A	15	798,000
	60.75.100A		1,005,000
BM 125-SN 3P	15.20.30.40.50A	22	1,183,000
	60.75.100.125A		
BM 100-HN 3P	15.20.30.40.50.60.75.100A	30	1,485,000
BM 100-STD 3P			
BM 100-H 3P	15.20.30.40.50.60.75.100A	50	3,080,000
BM 250-HB 3P	125.150.175.200.225.250A	50	4,455,000
BM 400-CN 3P		25	4,771,000
BM 400-SN 3P	250.300.350.400A	35	5,140,000
BM 400-HN 3P		50	5,445,000
BM 630-SN 3P		35	9,090,000
BM 630-HN 3P	500.600.630A	50	12,650,000
BM 800-CN 3P		35	10,758,000
BM 800-SN 3P	700.800A	50	13,310,000
BM 1000-HS 3P	1000A		26,450,000
BM 1200-HS 3P	1200A	100	30,140,000
BM 1600-HS 3P	1600A		40,700,000

MCCB (Aptomat) 3P Chỉnh dòng 0.8~1*In			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BM 100-HBN 3P	40.50.63.80.100A	36	2,310,000
BM 125-LTD 3P	40.50.63.80.100.125A		
BM 250-CN 3P		22	1,964,000
BM 250-SN 3P	125.150.175.200A	30	2,091,000
BM 250-HN 3P	225.250A	36	2,431,000

EMCCB (Aptomat) 3P IEC60947-2 Chỉnh dòng điện từ 0.4~1*In			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BM 400-HE 3P	400A	50	7,280,000
BM 630-RE 3P	630A	70	16,500,000
BM 800-HE 3P	800A		17,800,000
BM 1000-HE 3P	1000A	85	38,500,000
BM 1250-HE 3P	1250A		40,700,000

MCCB (Aptomat) 4P Tiêu chuẩn IEC60947-2			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BM 100-SN 4P	15.20.30.40.50A	15	1,162,020
	60.75.100A		1,189,000
BM 100-HN 4P	15.20.30.40.50A	30	1,658,500
	60.75.100A		
BM 250-SN 4P	125~250A	30	2,656,810
BM 250-HN 4P	(0.8~1*In Adj.)	36	3,460,380
BM 400-SN 4P		35	6,488,480
BM 400-HN 4P	250.300.350.400A	50	7,650,500
		35	13,347,180
BM 630-SN 4P	500.630A	50	13,965,640
BM 630-HN 4P		50	16,066,050
BM 800-SN 4P	800A	70	20,886,400
BM 800-HN 4P			

Phụ kiện MCCB – Bộ khởi động On/Off MCCB		
Mã hàng		Đơn giá (VND)
MT-100N	BM/BL 50-CN/100-MN.SN	7,000,000
MT-125N	dùng cho BM125-SN	7,300,000
MT-250N	BM/BL 250-CN.SN.HN	8,000,000
MT-250E	BM/BL 100-H/250-HB	8,200,000
MT-400N	BM/BL 400	11,000,000
MT-800N	BM/BL 630/800	12,300,000

Phụ kiện MCCB			
Mã hàng	Đơn giá (VND)		
	SHT	UVT	AUX
BM-50CN/100MN.SN	616,000	1,230,000	300,000
BM-100HN/125SN	660,000	1,444,000	380,000
BM-250CN.SN	869,000	1,630,000	460,000
BM-400CN.SN.HN	920,000	1,690,000	680,000
BM-630/800CN.SN	1,320,000	2,040,000	840,000
BM-1000~1600 HS	2,288,000	4,300,000	1,700,000

CB Chống giật Tiêu chuẩn IEC60947-2 Chỉnh dòng 30 - 100 – 500mA 0.1s			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BL 100-SN 3P	15.20.30.40.50A	15	1,848,000
	60.75.100A		1,958,000
BL 160-SN 3P	125.140.160A	30	3,828,000
BL 250-SN 3P	175.200.225.250A		3,850,000
BL 400-SN 3P	250.300.350.400A	35	8,140,000
BL 630-HN 3P	500.630A	50	13,200,000
BL 100-SN 4P	15~100A	15	3,190,000
BL 100-HN 4P		30	3,630,000
BL 160-SN 4P	125.140.160A	30	6,127,000
BL 250-SN 4P	175.200.225.250A		6,270,000
BL 400-SN 4P	250.300.350.400A	35	12,760,000
BL 630-HN 4P	500.630A	50	18,480,000

Relay bảo vệ pha- mất pha	
Mã hàng	Đơn giá (VND)
SLPR-4S (3P 220~440V)	1,100,000



Giá bán đã bao gồm thuế VAT 10%

MS / STARTER

Khởi động từ - Contactor						
Mã hàng	3φ 380V AC3			Tiếp điểm	Chọn rơ le nhiệt	Đơn giá (VND)
	KW	HP	A			
S-P 06	3	4	6	1a	TH-P09PP	230,000
S-P 09	4	5.5	9			
S-P 09 T				1a1b	275,000	
S-P 11	5.5	7.5	12	1a	TH-P12(E)	315,000
S-P 12 T				1a1b		345,000
S-P 16	7.5	10	18	TH-P20V(E)	451,000	
S-P 21 A	11	15	21		2a2b	469,000
S-P 30 T	15	20	30	TH-P20TAV(E)	629,000	
S-P 32 T	15	20	32		1a1b	500,000
S-P 35 T	18.5	25	35	2a2b		674,000
S-P 40 T	22	30	40		TH-P60V(E)	1,104,000
S-P 50 T	30	40	52			1,348,000
S-P 60 T	37	50	65		TH-P60TAV(E)	1,450,000
S-P 80 T	45	60	80			2,079,000
S-P 100 E	55	75	100	1a1b	TH-P120(E)	2,200,000
S-P 100 T	60	80	105			2,329,000
S-P 125 T	75	100	130	2a2b	TH-P120TAV(E)	3,267,000
S-P 150 T	90	125	160			4,312,000
S-P 220 T	120	160	220		TH-P220T(E)	5,702,000
S-P 300 T	160	220	300			8,800,000
S-P 400 T	220	300	400		TH-P400T(E)	11,440,000
M-600 C	315	420	600			33,000,000

Rơ le nhiệt (Có thanh đồng kết nối) - Overload		
Mã hàng	Dãy điều chỉnh nhiệt (A)	Đơn giá (VND)
TH-P09PP	1.3(1~1.6) ; 2(1.6~2.4) ; 3.2(2.4~4) ; 5(4~6)A	285,000
TH-P12(E)	0.25(0.19~0.31) ; 0.4(0.3~0.5) ; 0.6(0.45~0.75)A	244,200
	0.9(0.7~1.1) ; 1.2(0.9~1.5) ; 1.7(1.3~2.1)A	
	2.1(1.6~2.6) ; 3.3(2.5~4.1) ; 4.4(3.4~5.4)A	
	6.5(5~8) ; 9(7~11) ; 11(9~13) ; 15(12~18)A	
TH-P18	9~21A	258,000
TH-P20V(E)	9(7~11) ; 11(9~13) ; 15(12~18) ; 21(17~24)A	275,000
TH-P20TAV(E)	28(22~34) ; 33(28~38) ; 40A(32~48)A	300,300
TH-P60V(E)	33(28~38) ; 40(32~48) ; 54(43~65)A	395,000
TH-P60TAV(E)	67(54~80) ; 80(60~100)A	457,600
TH-P120(E)	40(32~48) ; 54(43~65) ; 67(54~80) ; 80(60~100)	870,000
TH-P120TAV(E)	105(80~130)A	1,150,000
	130(100~160) ; 160(120~200)A	
TH-P220T(E)	200(150~250)A	2,530,000
TH-P400T(E)	260(200~320) ; 350(260~400)A	3,630,000

Khởi động từ hộp					
Mã hàng	3P 220V		3P 380V		Đơn giá (VND)
	KW	HP	KW	HP	
MS-P 11 PB	0.2	1/4	0.4	1/2	651,000
	0.3	2/5	0.75	1	
	0.4	1/2	1.1	1.5	
	0.75	1	1.5	2	
	1.1	1.5	2.2	3	
	1.5	2	3	4	
	2.2	3	3.7	5.5	
	3	4	5.5	7.5	
	3.7	5	7.5	10	
MS-P 16 PB	5.5	7.5	12	15	774,000
MS-P 21 PB	7.5	10	15	20	861,000
MS-P 35 TPB	11	15	22	30	1,502,000
MS-P 40 TPB					1,523,000

Phụ kiện Khởi động từ			
Coil: 24.48.110.220.380V	Đơn giá (VND)	Tiếp điểm phụ (S-P11~21A)	Đơn giá (VND)
Coil dùng cho S-P 11~21	125,000	AP-11S	77,000
Coil dùng cho S-P 30/35/40	160,000	APS-11S	85,000
Coil dùng cho S-P 50/60	190,000	AP-22S	149,000
Coil dùng cho S-P 80	350,000		
Coil dùng cho S-P 100	480,000		
Coil dùng cho S-P 125/150	830,000	Nút nhấn – Push Button	Đơn giá (VND)
Coil dùng cho S-P 220	900,000	PB-2	77,000
Coil dùng cho S-P 300/400	5,000,000	PB-3	145,000
Khóa liên động			Đơn giá (VND)
MPU-11	dùng cho S-2XP 11,35,40,50,60T		110,000
MPU-21	dùng cho S-2XP 12,16,21,25T		120,000
MPU-50	dùng cho S-2XP 80T		180,000
MPU-125	dùng cho S-2XP 125~220T		330,000
Capacitor Unit		Kvar/380V	Đơn giá (VND)
AP-40-A	dùng cho S-P 11	12.5	411,000
	dùng cho S-P 16	16.7	
	dùng cho S-P 21A	20	
AP-40-B	dùng cho S-P 40T	25	460,000
	dùng cho S-P 50T	33.3	
	dùng cho S-P 60T	45	
	dùng cho S-P 80T	60	

Contactor Relay		
Mã hàng	Tiếp điểm phụ	Đơn giá (VND)
SR-P40	4NO / 3NO 1NC / 2NO 2NC	330,000
SR-P50	5NO / 4NO 1NC / 3NO 2NC / 2NO 3NC	385,000
SR-P80	8NO / 7NO 1NC / 6NO 2NC / 5NO 3NC / 4NO 4NC	484,000

Khởi động từ kép	
Chuyên dùng cho cửa cuốn (Chuyển động thuận, nghịch)	Đơn giá (VND)
RC-11C	Coil : 220 or 380VAC 957,000

Manual Motor Starter = MCB + Overload (3P)			
Mã hàng	Current In (A)	HP 3φ 380V	Đơn giá (VND)
MR-32S-0.16	0.1~0.16	1/30	528,000
MR-32S-0.25	0.16~0.25	1/19	
MR-32S-0.4	0.25~0.4	1/8	
MR-32S-0.63	0.4~0.63	1/4	
MR-32S-1	0.63~1	1/3	
MR-32S-1.6	1~1.6	1/2	
MR-32S-2.5	1.6~2.5	1	
MR-32S-4	2.5~4	2	
MR-32S-6.3	4~6.3	3	
MR-32S-10	6~10	4~5	539,000
MR-32S-14	9~14	5~7.5	
MR-32S-18	13~18	10	
MR-32S-23	17~23	15	
MR-32S-25	20~25	15(16)	
MR-32S-32	24~32	20	




Capacitor Unit



Capacitor Unit	Magnetic Contactor	Maximum operating power(kvar)		
		220~240V	400~440V	660~690V
AP-40 A	S-P11	6.7	12.5	18
	S-P16	8.5	16.7	24
	S-P21	10	20	30
AP-40 B	S-P40T	15	25	36
	S-P50T	20	33.3	48
	S-P60T	25	45	58
	S-P80T	35	60	75

Manual Motor Starter

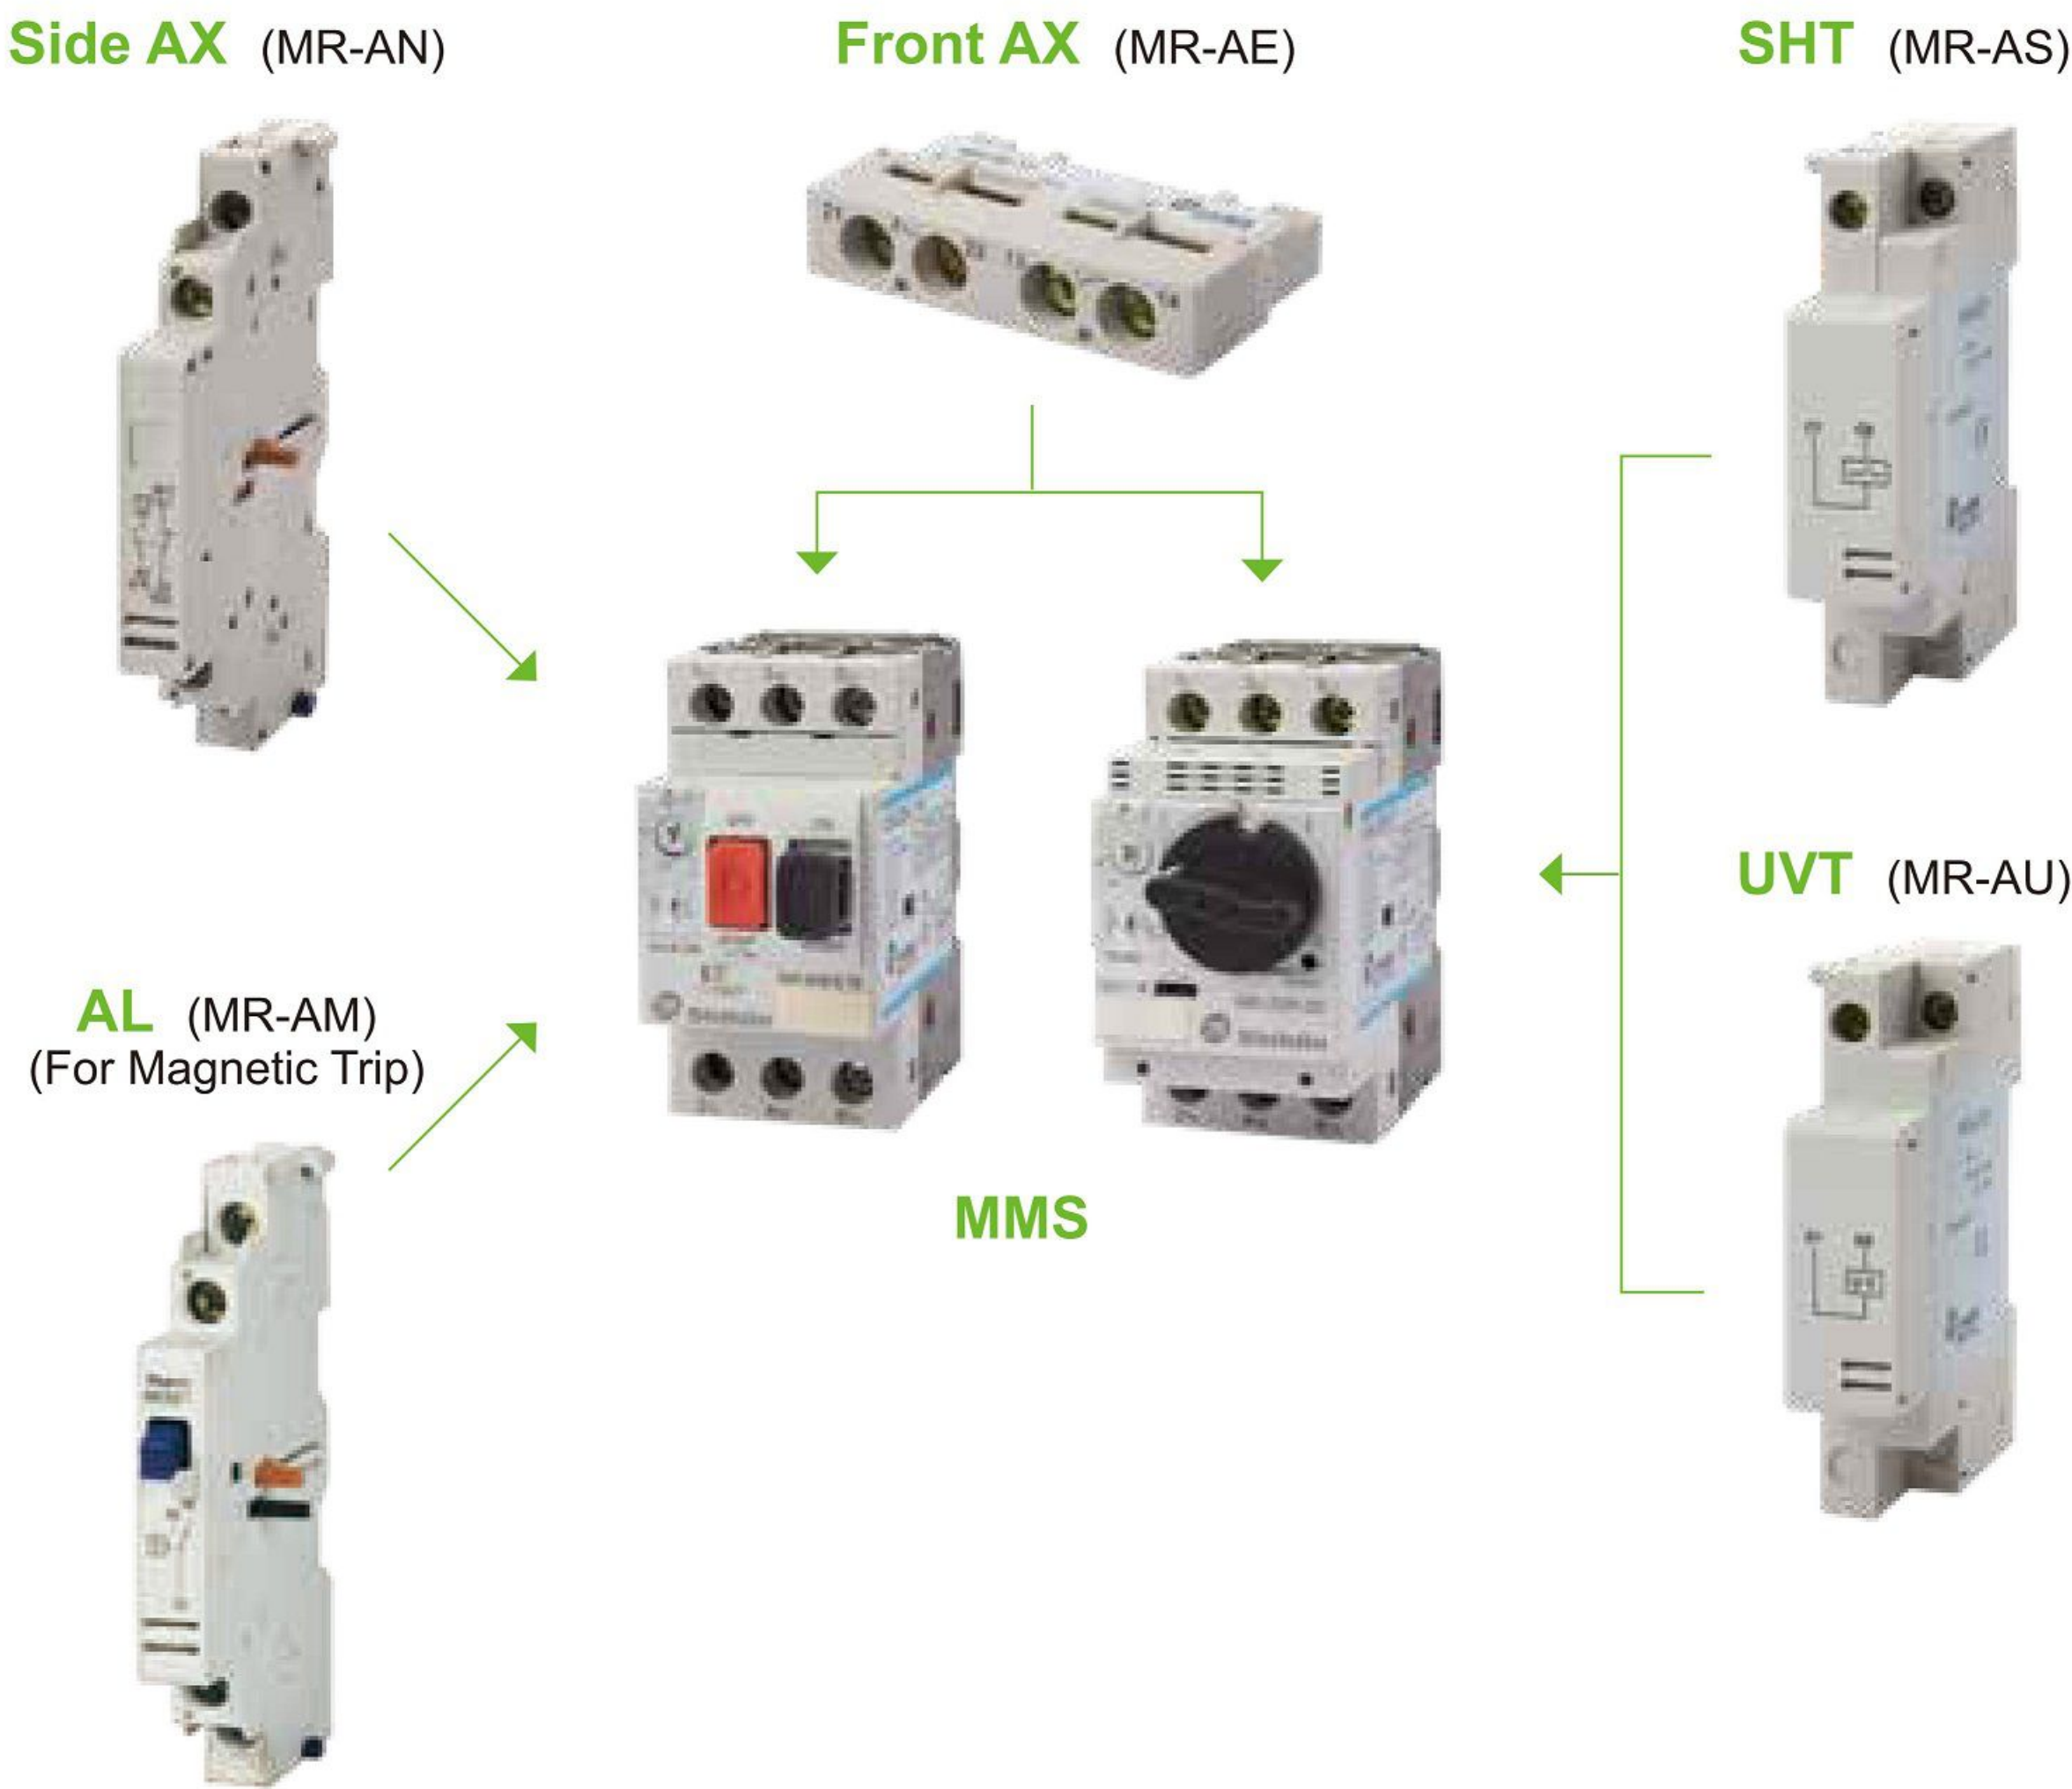

MCB (CB Tép) Tiêu chuẩn IEC60898 Màu trắng (6kA)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BHA 1P	6.10.16.20.25.32.40A	6	75,000
	50.63A		79,000
BHA 2P	6.10.16.20.25.32.40A		160,000
	50.63A		165,000
BHA 3P	6.10.16.20.25.32.40A		259,000
	50.63A		267,000
BHA 4P	6.10.16.20.25.32.40A		418,000
	50.63A		473,000

MCB (CB Tép) Tiêu chuẩn IEC60898 Màu trắng (10kA)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BHA 1P	6.10.16.20.25.32.40A	10	107,800
	50.63A		129,800
	80.100.125A		200,200
BHA 2P	6.10.16.20.25.32.40A		225,500
	50.63A		275,000
	80.100.125A		479,000
BHA 3P	6.10.16.20.25.32.40A		363,000
	50.63A		495,000
	80.100.125A		744,000
BHA 4P	6.10.16.20.25.32.40A		594,000
	50.63A		737,000
	80.100.125A		973,000

CB Chống giật (RCBO) Tiêu chuẩn IEC60947 30mA 0.1s			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BHL 1P+N	6.10.16.20A	6	341,000
	25.32A		363,000
BHL-A 1P+N	6.10.16.20A		341,000
	25.32A		363,000
	40.50.63A		627,000
BHL 2P	6.10.16.20A		616,000
	25.32A		644,000
	40.50.63A		656,000
BHL 3P	6.10.16.20.25.32A		770,000
	40.50.63A		924,000
BHL 4P	6.10.16.20.25.32A		860,000
	40.50.63A		1,050,000

CB Chống giật (RCCB) Tiêu chuẩn IEC60947 30mA 0.1s		
Mã hàng	Dòng định mức (A)	Đơn giá (VND)
BHR-A 2P	25.32.40A	616,000
	63A	627,000
BHR-A 4P	25.32.40A	770,000
	63A	855,000

CB Chống giật (RCCB) Tiêu chuẩn CNS 14816-2 30mA 0.1s				
Mã hàng	P	Dòng định mức (A)	kA	Đơn giá (VND)
BL-KF	2P	15.20.30A	1.5	405,000
BL-K30F	3P			637,670
NV-BF	2P	15.20.30A	1.5	322,000

BL-BF			
Mã hàng	P	Dòng định mức (A)	Đơn giá (VND)
BL-BF C (MCB)	2P	15.20.30A	77,000
BL-BF V (RCCB)			190,000
BL-BF L (RCBO)			280,000

CB Chống giật (RCBO) Tiêu chuẩn CNS 14816-2 30mA 0.1s				
Mã hàng	P	Dòng định mức (A)	kA	Đơn giá (VND)
NVB-50L	2P	15.20.30.40.50A	5	620,000
NVB-50UL	1P			508,000
NVB-50UL	2P		10	846,000

SMC (Automatic)			
Mã hàng	P	Dòng định mức (A)	Đơn giá (VND)
SMC	2P	16A	186,000
		25A	
		40A	400,000
		63A	
	4P	16A	343,000
		25A	
		40A	550,000
		63A	

SMC(Manual)			
Mã hàng	P	Dòng định mức (A)	Đơn giá (VND)
SMC	2P	16A	253,000
		25A	
		40A	515,000
		63A	
	4P	16A	448,000
		25A	
		40A	694,000
		63A	

MCB (CB Tép) Tiêu chuẩn CNS14816-2 Màu đen			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BP 1P	15.20.30.40.50A	5	104,000
	60.75.100A		191,000
BP 2P	15.20.30.40.50A		216,000
	60.75.100A		373,000
BP 3P	15.20.30.40.50A	10	365,000
	60.75.100A		657,000
BPH 1P	15.20.30.40.50A		159,000
BPH 2P	15.20.30.40.50A		273,000
	60.75.100A		477,000
BPH 3P	15.20.30.40.50A		532,000
	60.75.100A		958,000





RPC Series

Feature:

- Overload & instantaneous protection
- Comply with IEC 60898-1 & IEC60947-2
- Window display for ON/OFF status
- Din-rail TH35mm tool free installation



RPV Series

Feature:

- Leakage protection
- Comply with IEC61008-1
- Window display for ON/OFF status and leakage indicator
- Leakage test bottom
- Din-rail TH35mm tool free installation



RPH Series

Feature:

- Overload & instantaneous protection
- Comply with IEC60947-2
- Window display for ON/OFF status
- Din-rail TH35mm tool free installation



RPL Series

Feature:

- Overload, instantaneous & Leakage protection
- Comply with IEC 61009-1
- Window display for leakage indicator
- Leakage test bottom
- Din-rail TH35mm tool free installation



Product		MCB		RCCB	RCBO
		RPC	RPH	RPV	RPL
Protection		Overload, Instantaneous		Leakage	Overload, Instantaneous, Leakage
Frame size		63AF	125AF	63AF	63AF
Rated current		6, 10, 16, 20, 25, 32, 40, 50, 63	80, 100, 125	16,20,25, 32, 40, 63	6, 10, 16, 20, 25, 32, 40, 50, 63
Instantaneous curve		B, C, D Type	10In	-	C, D Type
Poles		1, 2, 3, 4 Pole	1, 2, 3, 4 Pole	2P, 4P	1P+N
Rated Voltage		1P: 240/415V~ 2~4P: 415V~	1P: 240/415V~ 2~4P: 415V~	2P: 240V~ 4P: 415V~	2P: 240V~
Breaking Capacity		6kA, 10kA @240/415Vac	10kA@240/415Vac	IC=6kA, 10kA	6kA
Rated residual current	Operation I Δ n	-	-	10, 15, 30, 100, 300mA	10, 15, 30, 100, 300mA
	Non-operation I Δ no	-	-	0.5I Δ n	0.5I Δ n
Standard		IEC60898-1, IEC60947-2	IEC60947-2	IEC61008-1	IEC61009-1
Ui		500V	690V	500V	500V
Uimp		6KV	6KV	4KV	4KV
Trip Unit		Thermal magnetic	Thermal magnetic	Electro-magnetic	Electronic
Mechanical life		20000	10000	10000	10000
Electrical life		4000	4000	3000	3000

RP Series		
Rated Current(A)	Price MCB (VND)	
	6kA	10kA
RPC 1P 6-10-16-20-25-32-40A	61,000	103,000
RPC 1P 50-63A	64,000	124,000
RPC 2P 6-10-16-20-25-32-40A	130,000	215,000
RPC 2P 50-63A	134,000	263,000
RPC 3P 6-10-16-20-25-32-40A	210,000	347,000
RPC 3P 50-63A	216,000	473,000
RPC 4P 6-10-16-20-25-32-40A	338,000	567,000
RPC 4P 50-63A	383,000	703,000

RP Series	
Rated Current(A)	Price RCBO* (VND)
	6kA
RPL 1P+N 6-10-16-20A	341,000
RPL 1P+N 25-32A	363,000
RPL 1P+N 40-50-63A	627,000

* Rated residual current: 10, 15, 30, 100, 300mA

RP Series	
Rated Current(A)	Price MCB (VND)
	10kA
RPH 1P 80-100A	200,200
RPH 1P 125A	428,400
RPH 2P 80-100A	479,000
RPH 2P 125A	565,000
RPH 3P 80-100A	744,000
RPH 3P 125A	816,000
RPH 4P 80-100A	973,000
RPH 4P 125A	1,198,000

RP Series	
Rated Current(A)	Price RCBO* (VND)
	6kA
RPV 1P+N 16-20-25-32-40A	616,000
RPV 1P+N 63A	627,000
RPV 3P+N 16-20-25-32-40A	770,000
RPV 3P+N 63A	855,000

Closing coil unit



Closing Coil	
CMD01	AC 380V
CMD02	AC 220V
CMD03	DC 220V
CMD04	DC 110V
CMD05	AC 110V

Shunt release unit



Shunt Trip	
SHT01	AC 380V
SHT02	AC 220V
SHT03	DC 220V
SHT04	DC 110V
SHT05	AC 110V

Under voltage trip unit




Under Voltage Trip	
UVT01	Instantaneous AC 380V
UVT02	Delay AC 380V
UVT03	Instantaneous AC 220V
UVT04	Delay AC 220V
UVT05	Instantaneous AC 110V
UVT06	Delay AC 110V

Locking device



Locks	
LOK01	3 Locks, 2 Keys
LOK02	Door Interlock
LOK03	Button Lock
LOK04	Racking Lock
LOK05	Key Lock
LOK06	Lock Device
LOK07	2 Locks, 1 Key

Mechanical interlock device

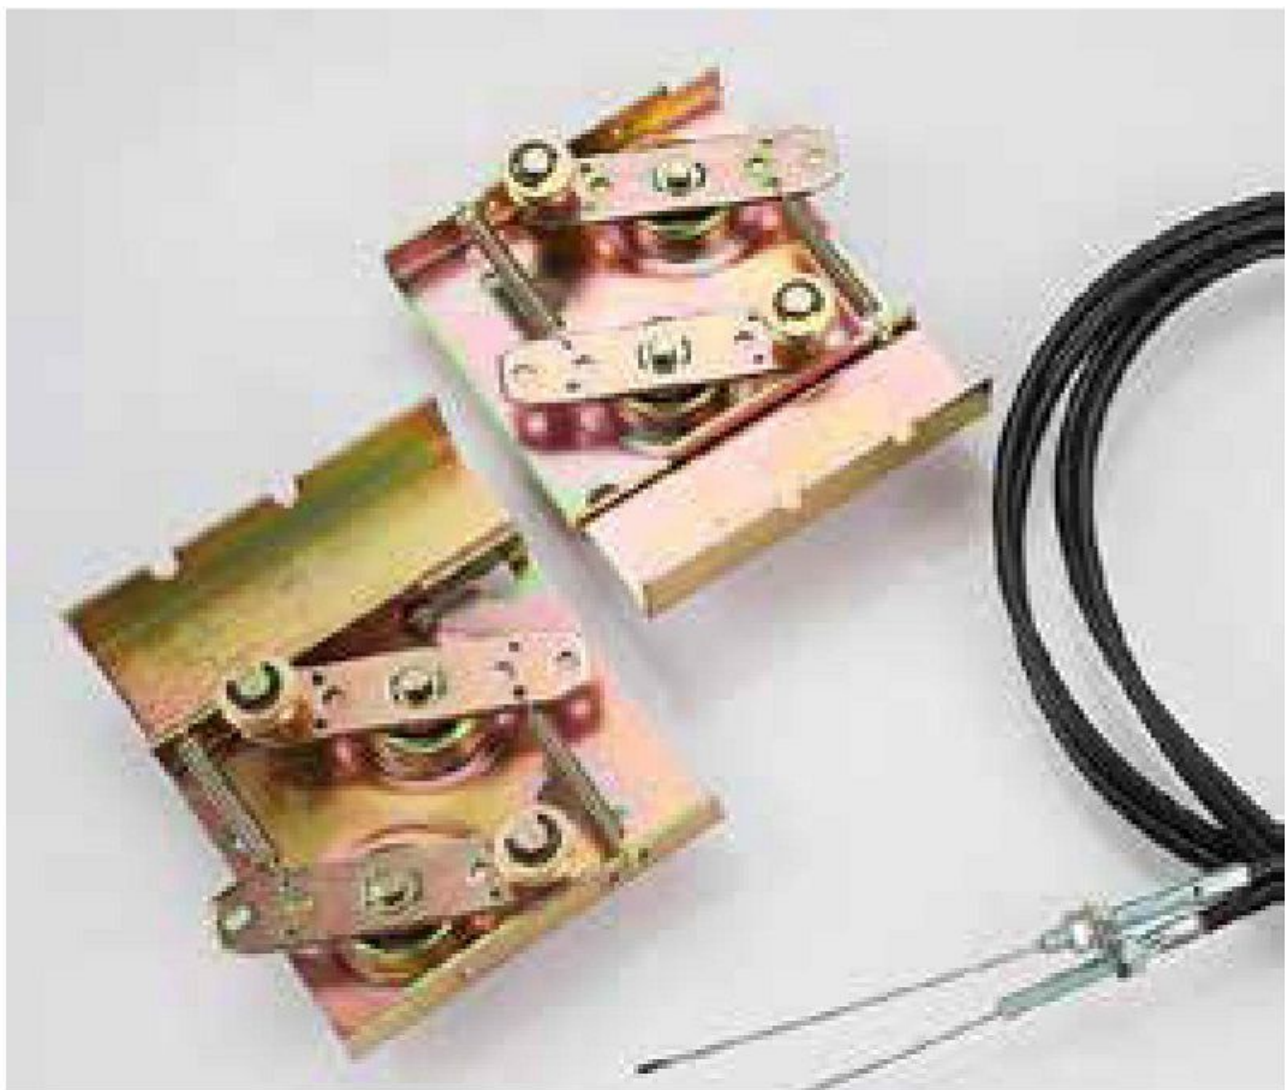

Mechanical Interlock	
MIL01	Drawout, Vertical, For 2
MIL02	Drawout, Horizontal, For 2, W/O cable
MIL03	Fixed, Vertical, For 2
MIL04	Fixed, Horizontal, For 2, W/O cable
MIL05	Drawout, Vertical, For 3
MIL06	Fixed, Vertical, For 3
MIL07	Drawout, Horizontal, Ø2.5mm*1.5m
MIL08	Fixed, Horizontal, Ø2.5mm*1.5m
MIL09	Drawout, Horizontal, For 3

Giá bán đã bao gồm thuế VAT 10%

ACB

ACB 3P FIXED Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BW 1600-SN 3P	630A	65	36,421,000
	800A		36,421,000
	1000A		38,005,000
	1250A		38,797,000
	1600A		42,755,000

ACB 4P FIXED Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BW 1600-SN 4P	630A	65	40,380,000
	800A		40,380,000
	1000A		41,964,000
	1250A		42,755,000
	1600A		47,506,000

ACB 3P DRAW OUT Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BW 1600-SN 3P	630A	65	49,283,000
	800A		49,283,000
	1000A		50,179,000
	1250A		51,971,000
	1600A		56,452,000

ACB 4P DRAW OUT Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BW 1600-SN 4P	630A	65	53,763,000
	800A		53,763,000
	1000A		55,556,000
	1250A		57,348,000
	1600A		63,620,000

ACB 3P FIXED Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BW 2000-HN 3P	630A	85	46,000,000
	800A		46,000,000
	1000A		48,000,000
	1250A		49,000,000
	1600A		54,000,000
	2000A		61,000,000
BW 3200-HN 3P	2500A	100	67,000,000
	3200A		81,000,000

ACB 4P FIXED Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BW 2000-HN 4P	630A	85	51,000,000
	800A		51,000,000
	1000A		53,000,000
	1250A		54,000,000
	1600A		60,000,000
	2000A		64,000,000
BW 3200-HN 4P	2500A	100	74,000,000
	3200A		89,000,000

ACB 3P DRAW OUT Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BW 2000-HN 3P	630A	85	55,000,000
	800A		55,000,000
	1000A		56,000,000
	1250A		58,000,000
	1600A		63,000,000
	2000A		69,000,000
BW 3200-HN 3P	2500A	100	81,000,000
	3200A		97,000,000
BW 4000-HN 3P	4000A	130	199,000,000
BW 6300-HS 3P	5000A		235,000,000
	6300A		260,000,000

ACB 4P DRAW OUT Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)			
Mã hàng	Dòng định mức (A)	kA	Đơn giá (VND)
BW 2000-HN 4P	630A	85	60,000,000
	800A		60,000,000
	1000A		62,000,000
	1250A		64,000,000
	1600A		71,000,000
	2000A		76,000,000
BW 3200-HN 4P	2500A	100	89,000,000
	3200A		107,000,000
BW 4000-HN 4P	4000A	130	210,000,000
BW 6300-HS 4P	5000A		300,000,000

Phụ kiện ACB	
Mã hàng	Đơn giá (VND)
UVT Bộ bảo vệ thấp áp delay 5 sec	9,350,000
Khóa liên động 2-way (Dùng cho 2 ACB)	21,450,000
Khóa liên động 3-way (Dùng cho 3 ACB)	33,000,000
Bảng điều khiển dùng cho ATS	9,900,000



Giá bán đã bao gồm thuế VAT 10%

ATS / SPD

ATS Loại MCCB Tiêu chuẩn IEC60947-2 – Giá đã bao gồm bảng điều khiển			
Mã hàng		Dòng định mức (A)	Đơn giá (VND)
BS100SN	3P	100A	13,762,000
BS100HN	3P		17,026,000
BS250SN	3P	250A	19,587,000
BS400SN	3P		33,925,000
BS400HN	3P	250.300.350.400A	34,053,000
BS630SN	3P		50,887,000
BS630HN	3P	500.600.630A	59,208,000
BS800SN	3P		64,713,000
BS1000HS	3P	1000A	145,620,000
BS1200HS	3P	1200A	165,463,000
BS1600HS	3P	1400.1600A	198,108,000

PC grade ATS 3P			PC grade ATS 4P		
Mã hàng	Dòng định mức (A)	Đơn giá (VND)	Mã hàng	Dòng định mức (A)	Đơn giá (VND)
XSTN-63	20A/40A/63A	13,044,000	XSTN-63	20A/40A/63A	13,906,000
	80A			80A	
XSTN-125	100A	14,769,000	XSTN-125	100A	15,739,000
	125A			125A	
XSTN-250	160A/ 200A/ 250A	17,000,000	XSTN-250	160A/ 200A/ 250A	27,812,000
XSTN-500	350A/ 450A/ 500A	25,626,000	XSTN-500	350A/ 450A/ 500A	29,322,000
XSTN-800	630A	32,132,000	XSTN-800	630A	36,663,000
	800A	38,638,000		800A	41,765,000
XSTN-1250	1000/1250A	49,167,000	XSTN-1250	1000/1250A	54,632,000
	1600A	60,232,000		1600A	67,795,000
XSTN-2500	2000A	78,517,000	XSTN-2500	2000A	91,953,000
	2500A	118,700,000		2500A	122,892,000
XSTN-5000	3150A	148,000,000	XSTN-5000	3150A	166,012,000
	4000A	268,422,000		4000A	291,815,000
	5000A	332,886,000		5000A	389,481,000

PC grade ATS controller	
Mã hàng	Đơn giá (VND)
XST-5 (Standard)	3,000,000
XST-6 (LCD)	3,600,000

Chống sét lan truyền								
Mã hàng	Imax (kA)	kA	Đơn giá (VND)					
			1P	2P(1P+N)	3P	4P(3P+N)	1P+PE	3P+PE
BHP-20	20	8/20	1,320,000	2,760,000	4,000,000	5,400,000	3,350,000	6,000,000
BHP-40	40		1,960,000	3,960,000	5,880,000	7,900,000	4,600,000	8,530,000
BHP-80	80		2,310,000	4,620,000	6,840,000	9,200,000	5,250,000	9,850,000
BHP-100	100		6,200,000	12,800,000	19,000,000	25,500,000	13,400,000	26,000,000
BHP-250	250	10/350	8,700,000	14,300,000	21,900,000	27,200,000	16,100,000	29,100,000
Counter-Bộ đếm TAD-04-99			3,600,000					

Đồng hồ đa năng: IEC 62052-22 RS-485		Bộ điều khiển tụ bù	
Mã hàng	Đơn giá (VND)	Mã hàng	Đơn giá (VND)
SPM-3	7,700,000	SH-JKWA-12J (APFR-12 Cấp)	9,000,000
SPM-8	12,500,000		



Headquarters

16F, No.88, Sec. 6, Zhongshan N. Rd., Shilin Dist.,
Taipei City 11155, Taiwan
T. +886-2-2834-2662
F. +886-2-2836-6187
<http://www.seec.com.tw>

Breaker & switchgears overseas sales dept.

3F, No.9, Sec. 1, Chang-an E. Rd., Zhongshan Dist.,
Taipei City 10441, Taiwan
T. +886-2-2541-9822
F. +886-2-2581-2665
e-mail. b.export@seec.com.tw
<http://circuit-breaker.seec.com.tw>

Distributor